




Maximum Performance

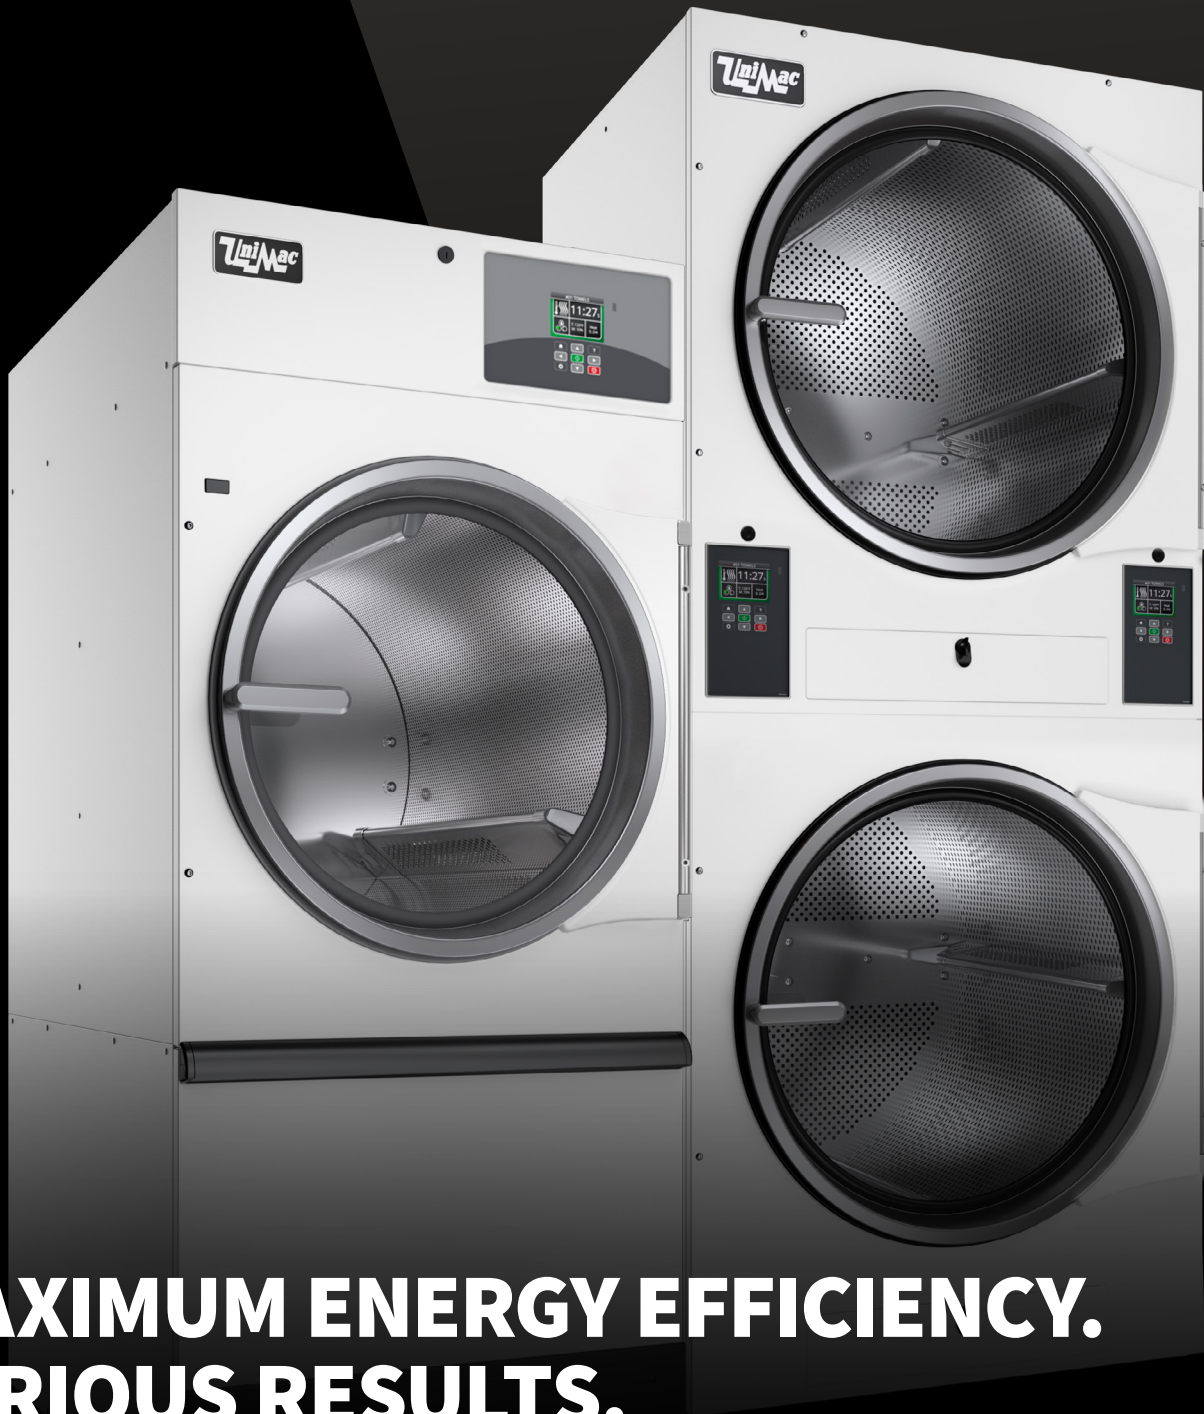

**MAXIMUM ENERGY EFFICIENCY.
SERIOUS RESULTS.**

UNIMAC.COM


UT & UTT SERIES 30-55 LB TUMBLE DRYERS

MAXIMUM PERFORMANCE WITH MORE CONTROL

Quality results are the goal of your on-premises laundry. However, you also want advanced functionality and access to the data that enables you to better manage your resources. UniMac® Premium tumble dryers deliver exceptional performance along with our legendary durability, while offering complete control of the operation.

LOWER YOUR COSTS WITH UNIMAC

Drying cycles are usually 30 percent longer than wash cycles. Reducing dry times to match wash times enables you to run your laundry at maximum efficiency. Our dryers are designed for fast drying, while balancing energy costs. With more than 70 years of dryer engineering experience, we have found the perfect balance between drying time and actual Btu usage to conserve energy, maximize throughput and lower labor costs.

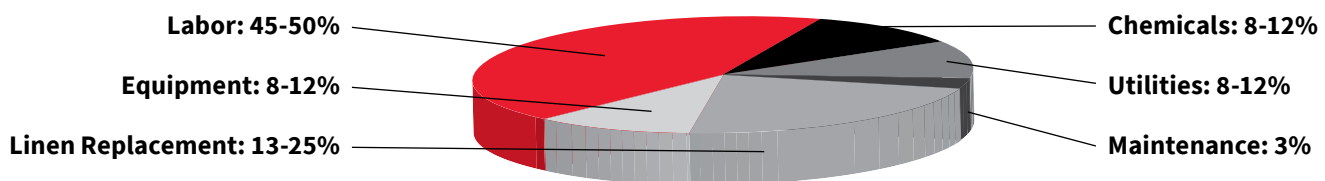

OPTidry™

OVER-DRY PREVENTION TECHNOLOGY*

UniMac's optional OPTidry system takes efficiency further by eliminating costly over-drying. Removing over-drying from your laundry not only reduces utility expenses, but also curbs labor costs and extends linen life, saving up to thousands of dollars annually.

* OPTidry™ is available for tumble dryers with the UniLinc™ control.




INDUSTRY-LEADING DURABILITY

When it comes to your machine lasting longer and looking good, the difference is in the details. And that's where UniMac shines. Our tumble dryers incorporate a durable cart bumper and kick plate to protect dryer fronts from scratches and dents incurred during the laundering process. Constructed of high-grade steel, our heavy-duty door and two-point hinges will stand up to the toughest laundry conditions.



Proudly based in Ripon, Wisconsin, USA, UniMac is dedicated to research, development and testing to provide equipment that delivers industrial strength and long-lasting quality. Our products undergo a 5-stage product-development process and are pushed beyond their limits in our state-of-the-art test lab to ensure they exceed the toughest demands of the commercial environment and meet our customers' highest standards.

MORE CONTROL OPTIONS



UniLinc™

The industry-exclusive UniLinc system from UniMac® represents the pinnacle of laundry management.

1. **FLEXIBLE OPERATION** UniLinc allows any combination up to 48 auto-dry, moisture-dry and time-dry cycles to be customized using real words instead of codes and a countdown to the end of cycle.
2. **EASY TO USE** Get started with the push of just two buttons.
3. **MONITOR YOUR LAUNDRY** Record start, stop and idle time between cycles to track the efficiency of your labor.
4. **REDUCE DOWNTIME** Receive automatic reminders of daily, weekly and monthly maintenance schedules, while machine errors are recorded by date and time for quick diagnosis and repair.



M SERIES CONTROL

This customizable control allows any combination up to 30 auto-dry and time-dry cycles to be saved, providing easy user interface.



DUAL DIGITAL TIMER (DDT) CONTROL

This economy control allows for the operator to select the ideal temperature, heating time and cooling time for each use.

PEACE OF MIND

UniMac offers a limited warranty for any part of the commercial dryer which fails as a result of a defect in materials or workmanship during the first three years (36 months) after the date of original installation.*

*Parts only, labor not included. See UniMac Warranty Bond for specifics.

UT SERIES TUMBLE DRYERS AT A GLANCE

- OPTidry™ Over-Dry Prevention Technology
- High-grade, heavy-duty steel door and two-point hinges
- Galvanized, pre-coated steel cylinder
- Electrostatically applied paint
- Extended tumble helps prevent wrinkling
- Long-lasting, 7/8" heavy-duty, rubber door gasket



SINGLE TUMBLE DRYERS

SPECIFICATIONS	UT030	UT055	UTT30	UTT45	
Control Options	UniLinc, M Series, Dual Digital	UniLinc, M Series, Dual Digital	UniLinc, M Series, Dual Digital	UniLinc, M Series, Dual Digital	
Capacity - lb (kg)	30 (14)	55 (25)	30 (14) x 2	45 (20) x 2	
Overall Width - in (mm)	27.9 (710)	34.5 (876)	31.5 (800)	34.5 (875)	
Overall Depth - in (mm)	45.5 (1155)	53.1 (1350)	43.6 (1110)	49.5 (1260)	
Overall Height - in (mm)	63.9 (1625)	66.7 (1700)	76.3 (1940)	81.3 (2065)	
Cylinder Diameter - in (mm)	26.5 (673)	33 (838)	30.0 (762)	33.0 (838)	
Cylinder Depth - in (mm)	31.8 (810)	35.0 (889)	26.0 (660)	30.0 (762)	
Cylinder Volume - cu. ft (liters)	9.6 (270)	17.3 (490)	10.6 (300)	14.8 (420)	
Reversing Cylinder	Standard	Standard	Standard	Standard	
Door Opening Size	22.7 (577)	26.9 (683)	22.6 (574)	26.9 (683)	
Heat Input Power	Gas 73,000 Btu/hr Electric 21 kW	112,000 Btu/hr 27 kW	73,000 x 2 Btu/hr 21 x 2 kW	95,000 x 2 Btu/hr -	
Gas Connections* - in (npt)	0.5	0.5	0.5	0.5	
Air Outlet - in (mm)	6 (150)	8 (200)	1 x 8 (200) Oval	1 x 10 (250) Oval	
Motor - HP	Fan 0.5 Cylinder 0.5	0.5 0.5	2 x 0.5 2 x 0.5	2 x 0.5 2 x 0.5	
Airflow - cfm (liters/sec)	500 (240)	700 (330)	2 x 400 (380)	2 x 600 (285)	
Electrical Specs - amps	Gas & Steam B 100-120V/50-60/1 X** 200-240V/50-60/1-3 N 440-480V/50-60/3 Electric G 230-240V/50-60/3 L 460-480V/50-60/3	10 6 3 52 27	12 7 3 67 34	16 9 6 33 x 2 16 x 2	- 12 6 - -
Shipping Dimensions Approx. - in (mm)	Width 30.0 (760) Depth 49.0 (1240) Height 67.6 (1720)	35.5 (900) 57 (1450) 70.5 (1790)	32.5 (830) 47.0 (1190) 79.9 (2030)	35.5 (900) 54.0 (1370) 84.9 (2160)	
Net Weight - lb (kg)	Gas 335 (152) Electric 339 (154)	438 (199) 426 (194)	580 (265) 605 (275)	690 (315) -	
Shipping Weight - lb (kg)	Gas 368 (167) Electric 373 (169)	478 (217) 466 (212)	615 (280) 640 (290)	735 (335) -	
Agency Approvals	CSA	CSA	CSA	CSA	

* Field conversions available for LP gas.

**X voltage can be connected to 1 or 3 phase power and operates on 1 phase only.



Chef de file en équipements de buanderie

6565 Rue Abrams, Ville St. Laurent, QC H4S 1X9

Phone: 1-888-427-2626 ■ Fax: 1-514-331-0800

email: info@harcoinc.ca ■ www.harco.com