

PM 12 Ironer Series



A new generation of ironers

Thoroughly cleaned and perfectly ironed table and bed linens are a key "feel-good" factor that keeps every guest cheerful and relaxed during visits to hotels, restaurants, nursing homes, and other establishments.

Available in three sizes and equipped with innovative product features and high-quality components, the Miele PM 12 ironer series sets new standards in laundry care.

Perfect laundry finish


- Adjustable temperature and speed settings
- Uniform contact pressure across entire roller length, thanks to hydraulic trough suspension, for perfect creases and crisp lines
- Aluminum trough allows short heat up times and even distribution
- Roller padding with Aramid needle felt cloth
- Perforated outfeed table for automatic air circulation and laundry cooldown

Ease of operation

- Large touchscreen display for simple program selection and easy access to important functions
- Freely positionable footswitch for fast and convenient ironer operation
- Finger guard provides operation safety

Perfect ergonomics

- Comfortably work in a seated or standing position thanks to adjustable working heights
- Easy operation by a single person; PM 1217 allows both single and two person operation
- Airing bar to easily hang linens without creases

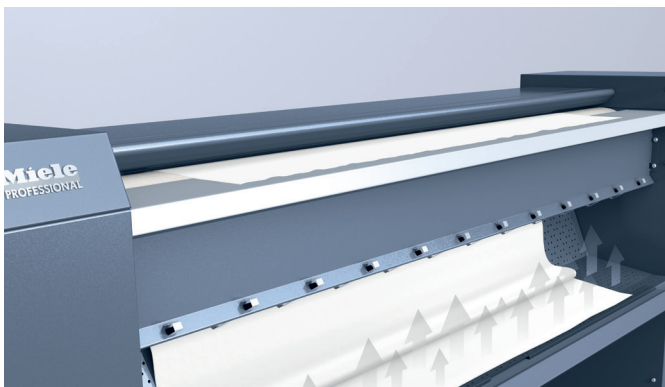

Trust the experts

Miele Professional meets the highest demands in laundry care while leading the way in the development of innovative technology.

Miele's complete laundry systems include washers, dryers and ironers that provide outstanding performance, capacity, and speed to showcase our 6 decades of laundry development.



5610 McAdam Road, Mississauga, Ontario L4Z 1P1
905.890.1220 • 800.387.9503 • Fax: 905.890.7039
email: harco@harco.com • www.harco.com



PM 12 Ironer Series



Ironers	PM 1210	PM 1214	PM 1217
Roller Diameter	8"	8"	10"
Roller Length	39"	55"	65"
Ironing Speed	59 - 158 inch/min	59 - 158 inch/min	59 - 177 inch/min
Ironing Throughput	50 lbs/hour with 15% Residual Moisture	62 lbs/hour with 25% Residual Moisture	110 lbs/hour with 25% Residual Moisture
External Dimensions	41"H x 62"W x 19"D	41"H x 78"W x 26"D	44"H x 88"W x 26"D
Working Height	36" - 39"	36" - 39"	40" - 43"
Number of Operators	One	One	One or Two
Weight	269 lbs	309 lbs	417 lbs
Heating Type	Electric	Electric	Electric
Heating	Standard: 3.3 kW	Standard: 7.1 kW	Standard: 11.8 kW
	Optional: 2.5/2.7 kW	Optional: 5.3/6.0 kW	Optional: 8.9/9.9 kW
Electrical Connection*	Standard: 2 AC 240V 60Hz	Standard: 3 AC 240V 60 Hz	Standard: 3 AC 240V 60 Hz
	Optional: 2 AC 208V 60Hz	Optional: 3 AC 208V 60 Hz	Optional: 3 AC 208V 60 Hz
	Optional: 2 AC 220V 60Hz	Optional: 3 AC 220V 60Hz	Optional: 3 AC 220V 60Hz
Total Rated Load	Standard: 3.7 kW	Standard: 7.6 kW	Standard: 12.4 kW
	Optional: 2.9/3.2 kW	Optional: 5.9/6.5 kW	Optional: 9.4/10.5 kW
Fuse Rating	2 x 20 Amps	3 x 30 Amps	3 x 50 Amps
Vent Connection	n/a	2 ¾"	2 ¾"
Airing Bar	Standard	Optional	n/a
4" Base	Optional	Optional	Optional

*Units come with a pig tail