



User friendly and totally programmable control.
7" color touch screen.
Create an infinite number of programs (29 pre-set and time-of-day promotions).
Import and export programs, statistics, and software updates via USB.
8 programmable signals for automatic liquid dosing.
Play videos.
37 available languages.
Wet Cleaning ready.



H E T

Up to **200** (hard-mount, low spin washers)



GHHKEKGP

Intelligent consumption
Optimal loading
Water Recovery tanks ready: ECOTANK
Low water consumption



JGTUCHKNKHM

Make to order: customization
OPL < > COIN
Electric < > Hot water
Drain valve < > Pump
Wet cleaning features



ECPPGEHKJKHM

Remote technical service
Management of laundries: OPL and COIN
Remote payment



GTICPCOKEU

Biggest door diameters: Ø14" (DLU-25/30) - Ø18" (DLU-40)
Easy opening/closing system for door lock.



OCKPHGPCPEG

Hinged panel: easy access to parts
Equivalent parts for all models.
Technical menu: traceability, error diagnosis.



CH<GTU


Grey skinplate outer casing
3 standard water inlets.
Drum and tub in stainless steel AISI 304
Detergent dispenser with 4 compartments
Electronic control of imbalance with frequency control
LOADING AID feature: water and rotation control
ETL, CE, and WRAS certified product.



237,216

- t 4UBJOMFTTTUFFM~~4~~*PVUFSDBTJOH
- t 4UBJOMFTTTUFFM~~4~~*GSPOUQBOM
- t %PVCMFESBJO%-6
- t ~~4~~UF~~4~~SOBMEPVCMFESBJO SFDPNNFOEFEGPS%-6
- t /P SNBMMZDMPTFEWBMWF
- t 8 BUFS3~~3~~ZTUFN
- t ~~4~~DIPSJOHCBT
- t , JXJUIFYUSBEPTJOHTJHOBMT
- t 1SDUFS
- t %PNVT~~4~~OOFDUDPNNVOJDBUJPOLJU
- t 4JMJDPOFHBTLFU
- t 3FWFSTJCMFEPSPQFOJOH
- t 4UFBNLJUUPUSBOTGPSNBO~~5~~8IFBUBENBDIJOFJOUTUFBNWFSTJPO
- t .BSJUJNFWP~~4~~MUBHFGPSFMFDUSJDNPEFMT7***~~4~~PFVUBM
- t ~~4~~JOUPLFOLJU
- t %FMBZFEPPSPQFOJOHJODBTFFGQPXFSPVUBHF
- t 4-6*~~4~~PEFMXJUINNESV~~4~~NQFSGPSBUJPOT

TECHNICAL DATA	UNIT.	DLU - 25 TOUCH II	DLU - 30 TOUCH II	DLU - 40 TOUCH II			
DRUM							
Load capacity	lbs	25	30	40			
Volume	cu ft	3.5	4.5	6			
Diameter	in	3.5	4.5	6			
Depth	in	13	16.92	18.50			
GENERAL DETAILS							
Washing speed/ Spinning speed	rpm	53/759	53/759	50/714			
Factor G	-	200	200	200			
Maximum force transmitted	kN	2,0 ±3	2,31 ±4	2,63 ±5			
Frequency-dynamic force	Hz	8,93	8,93	8,42			
Noise level	dB	<70	<70	<70			
Coin laundry version	-	Yes	Yes	Yes			
Double drain	-	Opt (external)	Opt (external)	Opt			
Weighing system / Tilting system	-	No/No	No/No	No/No			
SLUICE - Option		Yes	Yes	Yes			
DOOR							
Height center door/ Height door	in	22.44/12.20	22.44/12.20	25.78/13.70			
Diameter	in	14.68	14.68	18.11			
POWER							
Motor	Hp	1,48	1,48	2,9			
Electric heating power	kW	6	9	12			
Total electric power (electric model)	kW	6,25	9,5	12,75			
Total electric power (hw, steammodel)	kW	1,1	1,1	2,15			
CONNECTIONS		ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER	ELECTRICAL	STEAM / HOT WATER
208-240V / 50-60 Hz / 1	FLA (Amp)	32 A	6 A	50 A	6 A	63 A	10 A
208-240V / 50-60 Hz / 3	FLA (Amp)	20 A	-	32 A	-	40 A	-
440V / 50-60 Hz / 3	FLA (Amp)	16 A	-	16 A	-	20 A	-
Steam inlet (Steam model)	in	1/2"		1/2"		1/2"	
Maximum steam consumption (Steam model)	lbs/h	15.5		18.8		26.5	
Water inlet	in	3/4"		3/4"		3/4"	
Water main pressure	kg/cm²	2-4		2-4		2-4	
Maximum water consumption*	Gal/h	15.80		21		31.35	
Drain	in	3"		3"		3"	
Drainage capacity	gal/min	52.8		52.8		52.8	
DIMENSIONS / PACKING DIMENSIONS							
Net Width / Gross Width	in	28.3/31.5		28.3/31.5		31/33	
Net Depth / Gross Depth	in	26.4/39		32.67/39		33/39.76	
Net Height / Gross Height	in	45.59/53.14		45.59/53.14		51.45/59	
Net weight / Gross weight	lbs	478/496		526/545		620/664	
Volume	cu ft	37.8		37.8		46	

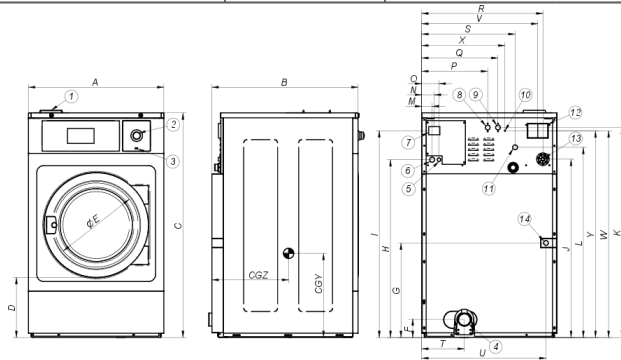

- 1 SOAP DISPENSER
- 2 EMERGENCY STOP
- 3 USB PORT
- 4 DRAIN
- 5 ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6 ELECTRICAL CONNECTION
- 7 MAIN SWITCH
- 8 AUXILIAR WATER INLET
- 9 HOT WATER INLET
- 10 EQUIPOTENTIAL CONNECTION
- 11 COLD WATER INLET
- 12 BLUR OUTPUT / WATER OVERLOAD
- 13 LIQUID SOAP CONNECTION
- 14 STEAM CONNECTION

* N°20 Program, 75% load

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
DLU-25	28.31	26.93	45.59	12.20	14.69	5.67	17.32	34.88	41.50	35.00	42.24	37.72	2.40	2.91	3.98	12.44	14.80	25.08	18.70	8.31	25.75	23.90	42.24	16.69	44.02	15.08	20.12
DLU-30	28.31	32.68	45.59	12.20	14.69	5.67	17.32	34.88	41.50	35.00	42.24	37.72	2.40	2.91	3.98	12.44	14.80	25.08	18.70	8.31	25.75	23.90	42.24	16.69	44.02	15.08	20.12
DLU-40	31.02	33.07	51.46	13.70	18.11	4.25	21.73	40.75	47.36	40.87	48.11	43.58	2.40	2.91	3.98	15.16	17.52	27.80	21.42	9.80	28.50	26.61	47.36	19.09	47.32	18.86	21.50