

HPW-20/HPW-25 TOUCH II

Heavy Professional Washer Extractors

Perfect for restaurants, salons, gyms, campgrounds, vended laundries, drycleaners, nurseries, and any business with limited space, that requires the performance of industrial laundry equipment.



OUTSTANDING FEATURES

Soft Mount for easy installation

Programmable G FACTOR up to 450G

User-friendly, programmable TOUCH II microprocessor

with a 4.3" touch screen

8 dosing signals standard

2 water inlets

USB Connection: PC software free of charge

Remote communication ready

Payment system ready

Short washing cycles (Heating Power 6 kW).



Significant water savings, automatically adjusts water and chemicals

Up to 450G-force extraction, fully programmable Reduces drying time and saves energy



CONNECTIVITY

DomusConnect - Manage your laundry operations from anywhere, at anytime, 24/7 Provided at NO extra charge





Easily converts from OPL to COIN ELECTRIC < > HOT WATER

PUMP < > DRAIN VALVE SINGLE < > STACKED

Wetcleaning ready, adjust water levels and speed



O-O ROBUSTNESS

AISI-304 stainless steel top and front panels AISI-304 stainless steel inner/outer drum and ribs Robust aluminum door

No inner drum seal (muffle), easy to repair and clean Industrial house bearing and bearings

15.000+ working hours

Same motor & inverter as DOMUS industrial washers Heavy duty door lock

Lower front panel lip to prevent water damage



MORE INFO

Free standing washers (leveling feet included) Loading Aid feature: water and rotation control Frequency inverter to control imbalances CE, WRAS and ETL approved



SOAP DISPENSER

Detergent dispenser with 4 compartments


OPTIONS

- Auto unlock kit for door (in case of power failure) recommended for vended laundries
- Double drain
- Drain-pump kit
- Silicon gasket
- Reversible door opening
- Relay card with 6 extra dosing signals: up to 14 signals
- DomusConnect communication kit
- Normally closed drain valve
- Plinth for better ergonomics
- Plinth for mops, with filter (only valve models)
- Plinth for water recovery (tank included)
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin/token kit

TECHNICAL DATA	UNIT.	HPW-20 V		HPV	V-20 P	HPV	V-25 V	HPW-25 P			
DRUM											
Load capacity	lb		20		20		25	25			
Volume	cu ft		3		3		4	4			
Diameter	in	20	0.95	20	0.95	20	0.95	20.95			
Depth	in	14	4.17	14	4.17	16	5.73	10	16.73		
GENERAL DETAILS											
Washing speed / Spinning speed	r.p.m.	50 /	1,250	50 /	1,250	50 /	1,250	50 / 1,250			
G Factor	-	Up to	o 450G	Upt	o 450G	Upt	o 450G	Up to 450G			
Maximum force transmitted	KN	1.47	± 0.53	1.47	± 0.53	1.57	± 0.53	1.57 ± 0.53			
Frequency-dynamic force	Hz	18.33		18	3.33	18	8.33	18.33			
Coin laundry version	-	Yes		,	⁄es	,	Yes	Yes			
Double drain	-	Yes			No	,	Yes	No			
Noise level	dB	<70		<	:70	<	<70	<70			
Weighing / Tilting system	-	No/No		No	o/No	No	o/No	No/No			
DOOR											
Height center door / Height base door	in	21.15/11		21.	15/11	21.	15/11	21.15/11			
Diameter	in	14.69		14.69		14.69		14.69			
POWER											
Motor	kW	0.75		С	.75	C).75	0.75			
Electric heating power	kW	6		6		6		6			
Total electric power (electric model)	kW	6.25		6	.25	6	5.25	6.25			
Total electric power (hot water model)	kW	0.75		С	.75	C).75	0.75			
CONNECTIONS		Electric Heating	Hot Water	Electric Heating	g Hot Water	Electric Heating	Hot Water	Electric Heating	Hot Water		
110V / 50-60Hz / 1	FL Amp	-	10A	-	10A	-	10A	-	10A		
230V / 50-60Hz /3	FL Amp	20A	-	20A	-	20A	-	20A	-		
230V / 50-60Hz /1	FL Amp	32A	6A	32A	6A	32A	6A	32A	6A		
Water inlet	inch	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"		
Drain	inch	2"		1" (Pump)		2"		1" (Pump)			
DIMENSIONS / PACKING DIMENSIC	NS										
Width / width	in	26.77/28		26.77/28		26.	77/28	26.77/28			
Depth / depth	in	27.4/33		27	.4/33	30.	39/33	30.39/33			
Height / height	in	41/44.5		41	/44.5	41	/44.5	41/44.5			
Net weight / Gross weight	lb	309/331		309	9/331	309	9/331	311/352			

V drain valve 2" (gravity).

P drain pump

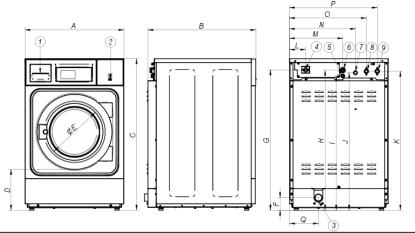

- 1. SOAP DISPENSER
- 2. USB PORT
- 3. DRAIN
- 4. MAIN SWITCH
- 5. ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6. ELECTRICAL CONNECTION
- 7. LIQUID SOAP CONNECTION
- 8. COLD WATER INLET
- 9. HOT WATER INLET

DIMENSIONS (in)	Α	В	С	D	E	F	G	н	1	J	K	L	M	N	0	P	Q
HPW-20 V	26.77	27.48	40.94	10.94	14.69	3.39	37.95	37.87	36.30	37.17	37.56	4.33	14.41	17.83	20.79	23.74	7.83
HPW-20 P	26.77	27.48	40.94	10.94	14.69	-	37.95	37.87	36.30	37.17	37.56	4.33	14.41	17.83	20.79	23.74	-
HPW-25 V	26.77	30.39	40.94	10.94	14.69	3.39	37.95	37.87	36.30	37.17	37.56	4.33	14.41	17.83	20.79	23.74	7.83
HPW-25 P	26.77	30.39	40.94	10.94	14.69	-	37.95	37.87	36.30	37.17	37.56	4.33	14.41	17.83	20.79	23.74	-

03.27.25 Domus Professional Washers

