



TOUCH II

7" touchscreen, user friendly and totally programmable.
Videos on display, ads, instructions.
37 Languages.
Free software for programming, telemetry, data analysis.
USB Connection



OUTSTANDING FEATURES

Reversing drum action is standard.
Stainless steel drum **(optional)**.
Frequency inverter is standard.



EFFICIENCY

Double Flow: mixed axial-radial airflow, Optional.
Large Lint filter.



VERSATILITY

Make to order - customization.
OPL > Coin laundry - Standard OPL model easily transformable to coin laundry uses
WET CLEANING configuration.



CONNECTIVITY

IoT - **DOMUSCONNECT** standard.
Management of laundries: OPL and self-service.



ERGONOMICS

Lint Filter Drawer, stainless steel mesh.
Large Loading doors.



MAINTENANCE

Hinged control panel: easy and ergonomic access.
Technical menu: statistics for technicians.
Easy access to parts for reparability.



OTHERS

Grey skin plate outer casing, stainless steel look.
NEW: Geared motor drive on models UDTT-100 to UDTT-180
SOFT DRY - new drum with stamped holes.
COOL DOWN - anti-wrinkle at the end of the cycle.
Heating options: natural gas and propane.
CE approved




OPTIONS

- License IoT - Domus Connect
- Natural gas heated tumble dryer
- EFFICIENT DRY Humidity sensor
- Double door glass UDTT-65 to UDTT-180
- Fire extinguisher SFEX UDTT-80
- Opposite door opening UDTT-25 to UDTT-80
- Tropicalized model
- Dosing-spraying
- Back panel with air filter UDTT-25 to UDTT-80
- Lint filter with grid 0.02 In (standard is 0.01 In)
- Lint filter with grid 0.04 In (standard is 0.01 In)
- Stainless steel front and side panels UDTT-80
- Front panel in stainless steel UDTT-65/80

CAPACITY & DRUM	UNIT.	UDTT-80
Capacity 1/18	Kg	36.7
	lb	80.8
Capacity 1/20	Kg	33
	lb	72.8
Ø Drum	mm	947
	inch	37.28
Drum length	mm	936
	inch	36.85
Drum volume	l	660
	cu ft	23.30
Ø Door hole	mm	802
	inch	31.57
Door center height	mm	1040
	inch	40.94
Height from floor to bottom of door	mm	578
	inch	22.74
ELECTRIC HEATING		
Evaporation capacity	L/h	31.1
	US gallon/h	8.2
Hourly output	Kg/h	60
	lb/h	132.3
Installed heating power	kW	36
Installed electrical power	kW	37.15
Drum motor power	kW	0.55
GAS HEATING		
Evaporation capacity (gas model)	L/h	32.1
	US gallon/h	8480
Hourly output (gas model)	Kg/h	63.9
	lb/h	140.9
Installed gas heating power	kcal/h	352761
	Btu/h	39986.5
Installed gas heating power	kW	41
Installed electrical power	kW	1.15
Instant propane gas consumption (G31)	Kg/h	6.51
	lb/h	7.74
Instant natural gas consumption (G20)	m³/h	4.34
	cfm	2.55
Ø Gas inlet	BSPP ISO 228-1	1/2"
STEAM HEATING		
Installed steam heating power	kW	50.1
	Btu/h	170648
Installed electrical power	kW	1.15
Steam consumption (8 barG) - Standard	kg/h	89
Steam consumption (116 psiG)	lb/h	107.2
Steam pressure	barG	6 - 9
	psiG	87 - 130.5
Standard steam inlet - outlet	BSPT- ISO7.1	1"
Standard steam inlet - outlet	NPT ANSI B1.20.1 Tapered	1"
Steam consumption (5 barG) - Low Pressure	kg/h	93
Steam consumption (72,5 psiG) - Low Pressure	lb/h	112
Steam pressure (low pressure)	barG	3 - 6
	psiG	43.5 - 89
Low pressure steam inlet - outlet	BSPT- ISO7.1	1" 1/2
THERMAL OIL HEATING		
Installed heating power	kW	-
Installed electrical power	kW	-
Fluid consumption (T max 175°C)	m3/h	-

Thermal oil connection	BSP	-	
VENTILATION			
Fan motor power	kW	0.55	
Nominal air flow rate	m³/h	1200	
	cfm	706.29	
Ø Fume exhaust	mm	200	
Ø Fume exhaust	inch	7.87	
HEAT EMISSION			
Maximum total heat emission	kW	2.88	
	Btu/h	12290.9	
Max. front heat emission	kW	2.52	
	Btu/h	8603.6	
CONNECTIONS		E	G
Voltage 120/60/1~ + G	Nº x AWG / A	-	3 X 12 /20 A
Voltage 230 - 3~ + G	-	-	-
Voltage 480- 3~ + G	-	-	-
NET DIMENSIONS / D. WITH PACKING			
Net / gross width	mm	985 / 1.065	
	inch	38,78 / 41,93	
Net / gross depth	mm	1.210 / 1.310	
	inch	47,64 / 51,57	
Net height / gross height without heating	mm	1.975 / 2.080	
	inch	77,76 / 81,89	
Net / gross weight	Kg	260 / 285	
	lb	573,20 / 628,32	
OTHERS			
Sound level	dB	64	

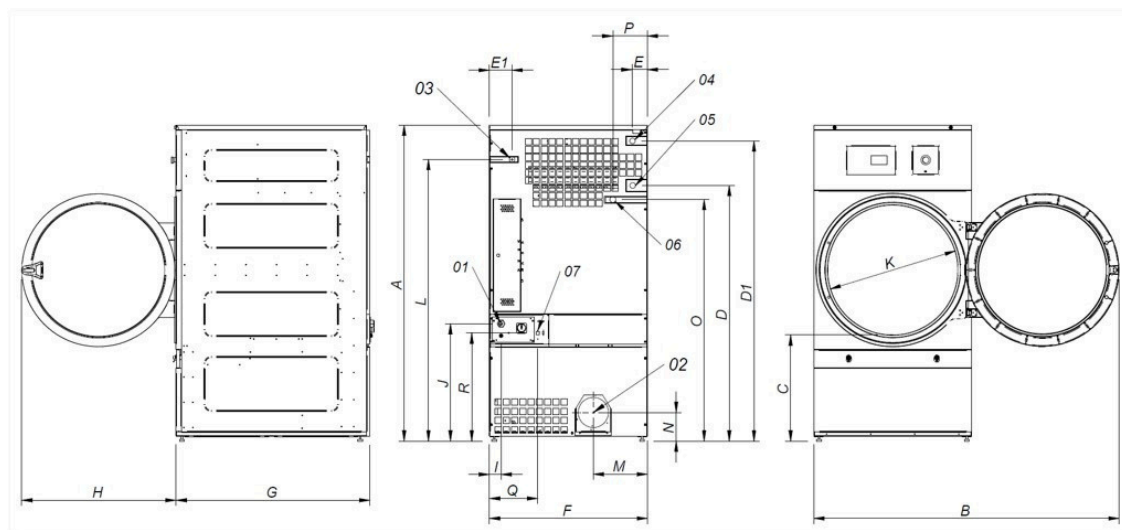

- 01 Power supply
- 02 Fumes output Ø 200
- 03 Gas inlet 1/2"
- 04 Steam inlet 1"
- 05 Condensate 1"
- 06 Sprinkler valve 3/4"
- 07 Ethernet connection (only TOUCH Control)

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P	Q	R
UDTT-80	77.76	75.19	25.98	62.59	73.81	4.01	5.11	38.77	47.63	38.18	2.75	28.74	31.57	69.29	13.2	7.00	59.44	8.46	11.8	26.61