

**UX-SOFTMOUNT
WASHER-EXTRACTORS**



SERIOUS ABOUT LAUNDRY.

UniMac




SERIOUS ABOUT LAUNDRY.

UX SOFTMOUNT WASHER-EXTRACTORS

UniMac has been recognized around the world as the leading manufacturer of commercial laundry equipment. We produce, sell and support more commercial washers and dryers in North America than any other company. Our UX washer-extractors are renowned for their durability, innovative features, efficient performance and flexible installation.

LOWER YOUR COSTS WITH UNIMAC

Consider the areas where you spend your laundry dollar. Understanding your expenses will better equip you to control them and ensure that you are operating at peak profitability.

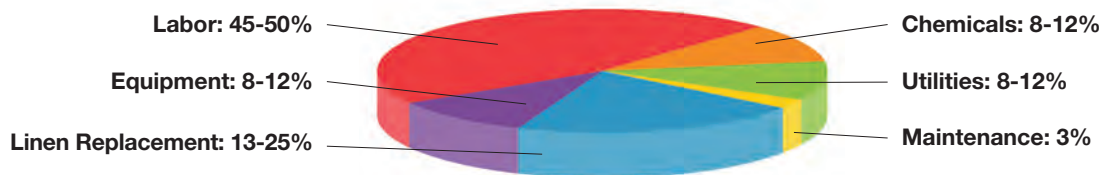

REDUCE YOUR LABOR AND UTILITY COSTS

Our UX Series machines are constructed to make your laundry operation more efficient and reduce two of your largest expenses — labor and utility costs — with these powerful features:

Our state-of-the-art **Intelligent Drive** system is designed to provide unique extraction speeds calibrated for different types of loads, so you'll never waste water or gas. The Intelligent Drive senses the speed (RPM) of the washer, allowing extreme accuracy even when the washer is reaching and maintaining high extraction speeds, easily accommodating separate speeds for blends, blankets and spreads, or heavy cotton towels.

Many laundries operate inefficiently due to a simple fact — dryer cycles are usually 30 percent longer than wash cycles. Each machine uses **Super High G-Force Extraction** to remove water with more power than the competitions' 100 G-Force machines, equalizing wash and dry times and allowing your laundry to run at maximum efficiency — and saving up to 40 percent on your gas and water bills compared to a standard 100 G-Force washer.

The **cycle counter function** assists management in monitoring proper cycle use and ensures that laundry operators are working at maximum efficiency. The total hours run function allows management to properly schedule routine maintenance.

FLEXIBLE INSTALLATION

Our softmount washer-extractors not only save on utility costs, but on installation costs as well. Softmount washer-extractors are the perfect choice for second-floor laundries or other installations where a poured foundation isn't an option.

We eliminate the need for special foundations with heavy-duty coil springs, and strategically placed shock absorbers result in a tuned suspension system that absorbs out-of-balance load vibrations. Plus, our efficient design uses 34 percent less space than some competitors' models, giving you more room to manage your laundry.

TAKE CONTROL OF YOUR LAUNDRY

Our **P Control** is extremely flexible and easy-to-use, providing 39 pre-programmed settings with a maximum of 99 total programs. A variety of specialized needs can be met with the advanced computer control. Programming options include an overnight soak to assist with stain removal and precise temperature-controlled fills.

INDUSTRY-LEADING DURABILITY

Featuring solid steel construction and heavy-duty precision bearings, our line of UX washer-extractors consistently achieve high levels of efficiency, quality and durability. Its all-welded construction leaves no riveted connections that can loosen or break over time. The stainless steel construction of the cabinet, top and sides are the same materials used to build skyscrapers.

WORRY-FREE PERFORMANCE

For more than 60 years, UniMac laundry machines have set the industry standard for quality, durability and performance. A five-year warranty protects the frame, basket, shaft, bearings and seals from failure or breakage during normal operation due to defects in material or workmanship. A limited three-year warranty is offered on all other parts.



UX SERIES — AT A GLANCE:

- Stainless steel front and top
- Easy access for maintenance and service
- Heavy duty hinge and door, plus reliable lock mechanism
- Water reuse capable
- Four water inlets standard on 100-165 lb models
- Bearing protection weap system
- Compact design
- Easy-to-read ProgressDisplay™
- Multi-faceted supply dispenser
- Five external supply connections and a four compartment internal supply dispenser



	UX18	UX25	UX35	UX55	UX75	UX100	UX135	UX165
Capacity - lb (kg)	18 (8.1)	25 (10.5)	35 (18.3)	55 (26)	75 (33.8)	100 (45.4)	135 (61.2)	165 (74.8)
Width - in (mm)	26 (660)	26 (660)	30 3/4 (780)	35 7/16 (900)	41 15/16 (1065)	47 1/4 (1200)	47 1/4 (1200)	51 1/4 (1300)
Depth - in (mm)	28 3/4 (770)	34 1/4 (870)	37 3/4 (960)	40 3/4 (1035)	46 9/16 (1183)	52 3/8 (1340)	59 1/16 (1510)	64 1/8 (1628)
Height - in (mm)	41 7/16 (1053)	41 7/16 (1053)	47 3/4 (1213)	60 1/2 (1538)	61 9/16 (1563)	75 9/16 (1920)	75 9/16 (1920)	82 11/16 (2100)
Cylinder Diameter - in (mm)	20 7/8 (530)	20 7/8 (530)	25 9/16 (650)	29 1/2 (750)	33 1/2 (850)	38 9/16 (980)	38 9/16 (980)	43 1/8 (1095)
Cylinder Depth - in (mm)	13 (330)	17 5/16 (440)	19 3/4 (500)	20 7/8 (530)	21 1/8 (537)	23 1/2 (597)	30 1/2 (775)	30 1/2 (775)
Cylinder Volume - cu.ft. (liters)	2.6 (73)	3.4 (95)	5.8 (165)	8.3 (234)	10.7 (304)	16.1 (455)	20.3 (575)	25.8 (730)
Door Opening Size - in (mm)	11 13/16 (300)	11 13/16 (300)	15 3/4 (400)	15 3/4 (400)	15 3/4 (400)	19 11/16 (500)	19 11/16 (500)	24 1/2 (622)
Door Bottom to Floor - in (mm)	11 (279)	11 (279)	11 1/2 (295)	20 7/8 (530)	22 (559)	25 1/2 (648)	25 1/2 (648)	23 3/4 (603)
Wash Speed - RPM	10-50	10-50	10-50	10-50	10-50	10-50	10-50	10-50
Distribution Speed - RPM	82	82	74	69	65	61	61	100
Extract Speed - RPM	250-1000	250-1000	250-1000	250-1000	250-1000	250-800	250-800	250-750
Extract G-Force	296	296	362	418	475	350	350	350
Water Inlet Conn. - in (mm)	2 x 3/4 (19)	2 x 3/4 (19)	2 x 3/4 (19)	2 x 3/4 (19)	2 x 3/4 (19)	4 x 3/4 (19)	4 x 3/4 (19)	4 x 1 (25)
Steam Inlet Conn. - in (mm)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/4 (19)
Drain Conn. Size - in (mm)	2 (50)	2 (50)	3 (75)	3 (75)	3 (75)	3 (75)	3 (75)	2 x 3 (75)
Motor Size - HP (kW)	1 (.75)	1 (.75)	3 (2.25)	4 (3)	5 (4)	7 (5.5)	10 (7.5)	15 (11.5)
Voltage/Hz/Phase Circuit	X 200-240/50-60 1/3 • 15	200-240/50-60 1/3 • 15	200-240/50-60 1/3 • 15	200-240/50-60 1/3 • 20	—	—	—	—
Breaker - FLA	Q —	—	—	—	200-240/50-60/3 • 20	200-240/50-60/3 • 30	200-240/50-60/3 • 40	200-240/50-60/3 • 40
	P 380-415/50-60/3 • 15	380-415/50-60/3 • 15	380-415/50-60/3 • 15	380-415/50-60/3 • 15	380-415/50-60/3 • 15	380-415/50-60/3 • 20	380-415/50-60/3 • 20	380-415/50-60/3 • 25
	N 440-480/50-60/3 • 15	440-480/50-60/3 • 15	440-480/50-60/3 • 15	440-480/50-60/3 • 15	440-480/50-60/3 • 15	440-480/50-60/3 • 20	440-480/50-60/3 • 20	440-480/50-60/3 • 25
Shipping Dimensions - in (mm)	H 46 1/16 (1170)	46 1/16 (1170)	53 1/8 (1350)	66 15/16 (1700)	68 1/2 (1740)	79 1/8 (2130)	79 1/8 (2130)	88 5/8 (2250)
	W 28 3/4 (730)	28 3/4 (730)	33 1/2 (850)	38 3/16 (970)	44 1/16 (1120)	51 1/4 (1300)	51 1/4 (1300)	57 1/8 (1400)
	D 33 1/16 (840)	37 3/8 (950)	40 1/8 (1020)	43 5/16 (1100)	49 5/8 (1260)	56 3/8 (1430)	64 1/4 (1630)	70 7/8 (1800)
Net Weight - lb (kg)	481 (218)	525 (238)	800 (363)	1177 (534)	1612 (731)	3521 (1597)	3940 (1787)	4960 (2250)
Shipping Weight - lb (kg)	525 (238)	569 1/2 (258)	889 (403)	1266 (574)	1722 (781)	3741 (1697)	4160 (1887)	5181 (2350)
Agency Approvals	CE, ETLus, ETLc	CE, ETLus, ETLc	CE, ETLus, ETLc	CE, ETLus, ETLc	CE, ETLus, ETLc	CE, ETLus, ETLc	CE, ETLus, ETLc	CE, ETLus, ETLc



To learn more, or to find a distributor in your area, visit UNIMAC.COM
Alliance Laundry Systems - Shepard St, Ripon WI 54971 - 1.800.587.5458 - 1.920.748.3121

Consult your UniMac distributor for details. For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2000.

© 2013 Alliance Laundry Systems LLC. Printed in the U.S.A.



SERIOUS ABOUT LAUNDRY.

DISTRIBUTOR INFORMATION HERE